



NEXT DAY DELIVERY

**5 YEAR WARRANTY
1 YR BATTERY**


WHITE FINISH

Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Control Gear	Area
NEXT DAY DELIVERY						
PSEW/3W/DST/COR	White	ø 50	155	35	DALI	Corridor
PSEW/3W/DST/OA	White	ø 50	123	35	DALI	Open Area


Distance table for evenescape routes - based upon 2m width of escape route

Lens	Mounting Height	Axial / Wall	Axial / Axial	Axial / Transverse	Transverse / Transverse	Transverse / Wall
Open Area	2m	2.97m	7.47m	7.36m	7.5m	2.97m
Corridor	2m	2.14m	5.76m	10.97m	16.72m	6.97m
Open Area	2.5m	2.98m	8.2m	8.07m	8.24m	3.09m
Corridor	2.5m	2.1m	6.1m	12.00m	19.05m	7.26m
Open Area	3m	3.00m	8.64m	8.53m	8.56m	3.11m
Corridor	3m	2.02m	6.4m	12.69m	20.17m	7.07m
Open Area	3.5m	2.83m	8.8m	8.71m	8.82m	3.04m
Corridor	3.5m	1.78m	6.01m	12.47m	20.73m	6.31m

Maintenance factor: 0.9
 Ballast lumen factor: 1.00
 Minimum illuminance on centre line: 1 lux
 Minimum illuminance on half of escape route width: 0.5 lux
 Diversity on the centre line maximum: 40:1

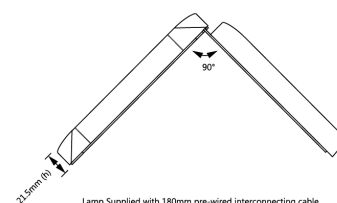

Lamp Supplied with 180mm pre-wired interconnecting cable.

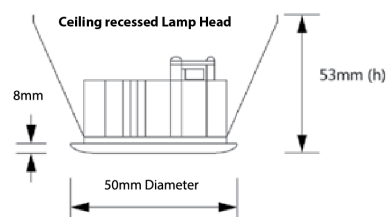

Recommended cut out of 42mm