

Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
LCSW/F/800/3K8	White	85mm dia	756	8	94.5	3000K	>80
LCSW/F/800/4K8	White	85mm dia	775	8	96.9	4000K	>80
LCSB/F/800/3K8	Black	85mm dia	756	8	94.5	3000K	>80
LCSB/F/800/4K8	Black	85mm dia	775	8	96.9	4000K	>80
LCSBA/F/800/3K8	Brushed Aluminium	85mm dia	756	8	94.5	3000K	>80
LCSBA/F/800/4K8	Brushed Aluminium	85mm dia	775	8	96.9	4000K	>80

- 3 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

COMMERCIAL LED DOWNLIGHT

Construction

- Multi-faceted reflector
- Die-cast aluminium
- Supplied with bezel

Features

- IP65
- Fire rated
- Emergency and dimming options

Applications

- Commercial and Business Areas
- Public buildings
- Retail environments
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Compact solution
- High performance
- Suitable for applications where ingress of dust and water is a concern

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'


Mounting Options

Code	Description
N/A	Recessed

Finish Options

Code	Description
W	White
B	Black
A	Brushed Aluminium

Dimensions

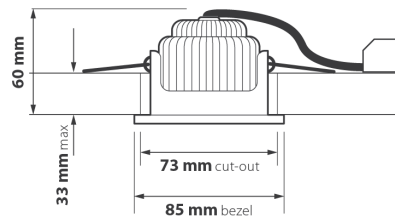

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required. Note The EM pack will not fit through the downlight hole so needs additional access