

Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
TRX/F/1100/3K8	See bezel options	195 ø	1139	11.1	102.6	3000	>80
TRX/F/1100/4K8	See bezel options	195 ø	1052	9.9	106.3	4000	>80
TRX/F/2000/3K8	See bezel options	195 ø	1881	19.4	97.0	3000	>80
TRX/F/2000/4K8	See bezel options	195 ø	1858	18.2	102.1	4000	>80
TRX/F/3000/3K8	See bezel options	195 ø	2677	26.4	101.4	3000	>80
TRX/F/3000/4K8	See bezel options	195 ø	2820	26.4	106.8	4000	>80

- Common bezels and attachments detailed, for special options contact us
- 5 year warranty
- See website for Relux
- For BIM contact us
- See website for Technical Data Sheet
- Tridonic or Philips boards as standard others available by request

COMMERCIAL LED DOWNLIGHT

Construction

- Professional LED downlight
- Range of Bezel options
- 60° satin etch reflector as standard
- Tridonic Advance LED

Features

- 5 year warranty
- L80 / F10 @ 50,000 hours
- Wide-beam light distribution

Applications

- Commercial and Business Areas
- Public buildings
- Housing
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Custom-fit options
- Contemporary style
- Part L and ECA compliant

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control


For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained DALI/Self Test

For emergency version, add onto end of part number as required

Dimensions

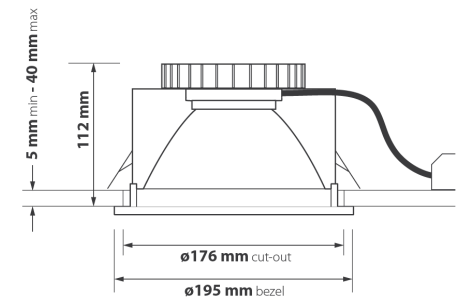

Bezel Options



TRX/BEZ/WH
White RAL 9010
bezel



TRX/BEZ/BW
Brilliant white RAL
9016 bezel



TRX/BEZ/CH
Chrome bezel



TRX/BEZ/BA
Brushed
Aluminium bezel

Attachments Options



TRX/BEZ/VH
Frosted vertical
ring. Requires
bezel



TRX/BEZ/HDG
Halo Drop Glass on
white bezel



TRX/BEZ/IP54/CG
IP54 Clear Glass.
Requires bezel



TRX/BEZ/IP54/OP
IP54 Opal
polycarbonate.
Requires bezel



TRX/BEZ/HL/F
Frosted hi-light
ring. Requires
bezel



Halo kits available