

Code	Finish	Distribution	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
ZTAIW/1/12/F/2750/4K8	White	Direct only	1215x175x40	2468	17.1	144.3	4000K	>80
ZTAIW/1/12/F/3550/4K8	White	Direct only	1215x175x40	3218	21.9	146.9	4000K	>80
ZTAIW/1/12/F/4650/4K8	White	Direct only	1215x175x40	4194	29.1	144.1	4000K	>80
ZTAIW/1/12/F/5200/4K8	White	Direct only	1215x175x40	4678	32.6	143.5	4000K	>80
ZTAIW/1/12/F/7200/4K8	White	Direct only	1215x175x40	6489	45.8	141.7	4000K	>80
ZTAIW/1/15/F/3450/4K8	White	Direct only	1495x175x40	3085	21.3	144.8	4000K	>80
ZTAIW/1/15/F/4450/4K8	White	Direct only	1495x175x40	4022	27	149.0	4000K	>80
ZTAIW/1/15/F/5800/4K8	White	Direct only	1495x175x40	5242	36	145.6	4000K	>80
ZTAIW/1/15/F/6450/4K8	White	Direct only	1495x175x40	5847	40.8	143.3	4000K	>80
ZTAIW/1/15/F/8950/4K8	White	Direct only	1495x175x40	8111	57.3	141.6	4000K	>80
ZTAIW/2/12/F/4100/4K8	White	Direct & Indirect	1215x175x40	4129	29.6	139.5	4000K	>80
ZTAIW/2/12/F/6550/4K8	White	Direct & Indirect	1215x175x40	6194	43.9	141.1	4000K	>80
ZTAIW/2/15/F/5300/4K8	White	Direct & Indirect	1495x175x40	5300	37.6	141.0	4000K	>80
ZTAIW/2/15/F/8400/4K8	White	Direct & Indirect	1495x175x40	8424	56.4	149.4	4000K	>80

- Part numbers are for individual luminaires.
- 3 year warranty
- See website for LDT files
- For CAD/BIM contact us
- For bespoke lengths please contact us
- See website for Technical Data Sheet

SUSPENDED DIRECT/INDIRECT LUMINAIRE

Construction

- Micro-prismatic PMMA diffuser
- Steel sheet

Features

- Wide range of sizes
- Direct and direct/indirect option
- Dimmable options

Applications

- Offices
- Public spaces
- Hospitals
- Retail
- Corridors
- Schools

Benefits

- IP44
- 3 year warranty

Optical Options

Code	Description
N/A	Low glare prismatic

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D'
for SwitchDim replace 'F' with 'S'

Mounting Options

Code	Description
N/A	Suspended

Finish Options

Code	Description
W	White (Standard)
B	Black


For Black finish, replace 'W' in part number with 'B'

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required

Dimensions

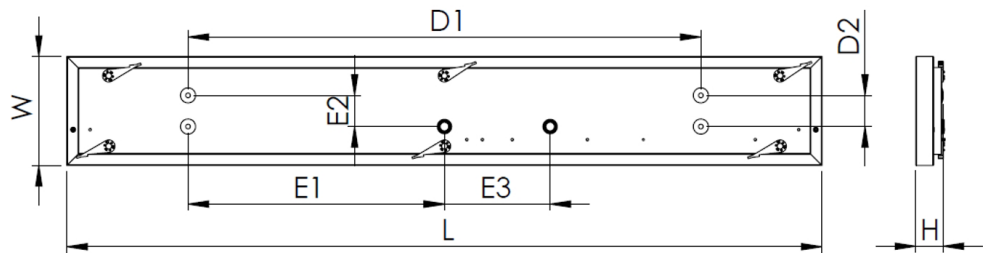

L, mm	W, mm	H, mm	D1, mm	D2, mm	E1, mm	E2, mm	E3, mm
1495	175	40	1125	50	563	50	170
1215	175	40	825	50	413	50	170
595	175	40	450	50	420	75	-
595	295	40	450	180	225	90	-
595	595	40	300	450	180	225	30