

Plaster in option



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
ECL/F/1000/3K8	See bezel options	ø 130	1020	8	127.5	3000	>80
ECL/F/1000/4K8	See bezel options	ø 130	1055	8	131.9	4000	>80
ECL/F/1800/3K8	See bezel options	ø 130	1725	13.8	125.0	3000	>80
ECL/F/1800/4K8	See bezel options	ø 130	1787	13.8	129.5	4000	>80
ECL/F/2500/3K8	See bezel options	ø 130	2363	19.2	123.1	3000	>80
ECL/F/2500/4K8	See bezel options	ø 130	2442	19.2	127.2	4000	>80
ECL/F/3000/3K8	See bezel options	ø 130	3146	27.8	113.2	3000	>80
ECL/F/3000/4K8	See bezel options	ø 130	3252	27.8	117.0	4000	>80

- Part numbers are for individual luminaires. Please specify luminaire and bezel.
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet
- Tridonic or Philips boards as standard others available by request

COMMERCIAL LED DOWNLIGHT

Construction

- 40° reflector supplied
- Die-cast twist and lock bezel
- Interchangeable accessories
- Tridonic LED boards

Features

- Plaster-in option available
- IP20
- Wide range of accessories

Applications

- Commercial and Business Areas
- Public buildings
- Co working spaces
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Supports part L compliance
- Life 50,000 hours (L70)
- Depth under 100mm
- Excellent luminaire efficacy

Optical Options

Code	Description
N/A	Multi-faceted 40° reflector
N/A	Other reflectors available

CCT Options

Code	Description
4K8	4000K
3K8	3000K

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D'
for SwitchDim replace 'F' with 'S'

Mounting Options


Code	Description
N/A	Recessed (Standard)
/PK	Plaster-in option

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained DALI/Self Test

For emergency version, add onto end of part number as required

Dimensions

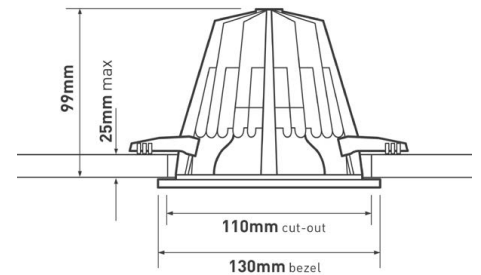

COMMERCIAL LED DOWNLIGHT

Bezel Options



ELC/BEZ/WH
White RAL 9010 bezel



ELC/BEZ/BW
Brilliant white RAL 9016 bezel



ELC/BEZ/CH
Chrome bezel



ELC/BEZ/BA
Brushed Aluminium bezel



ELC/BEZ/BL
Black RAL 9005 bezel

Attachments Options



ECL/BEZ/IP54/FF
IP54 Frosted Glass. Requires bezel



ECL/BEZ/IP54/CE
IP54 Centre Etched. Requires bezel



ECL/BEZ/IP54/CG
IP54 Clear Glass. Requires bezel



ECL/BEZ/VH
Frosted vertical ring. Requires bezel



ECL/BEZ/VH/BL
Blue vertical ring. Requires bezel



ECL/BEZ/HL/F
Frosted hi-light ring. Requires bezel



ECL/BEZ/HL/BL
Blue hi-light ring. Requires bezel



ECL/BEZ/HDG
Halo Drop Glass on white bezel



ECL/BEZ/IP65/CG
IP65 Clear Glass. Requires bezel