


# ECLIPSE SURFACE

## SURFACE/SUSPENDED DOWNLIGHT



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
<b>ECLSW/F/1000/3K8</b>	White	ø150	1020	8	127.5	3000	>80
<b>ECLSW/F/1000/4K8</b>	White	ø150	1055	8	131.9	4000	>80
<b>ECLSW/F/1800/3K8</b>	White	ø150	1725	13.8	125.0	3000	>80
<b>ECLSW/F/1800/4K8</b>	White	ø150	1787	13.8	129.5	4000	>80
<b>ECLSW/F/2500/3K8</b>	White	ø150	2363	19.2	123.1	3000	>80
<b>ECLSW/F/2500/4K8</b>	White	ø150	2442	19.2	127.2	4000	>80

- 5 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

# ECLIPSE SURFACE

## SURFACE/SUSPENDED DOWNLIGHT

### Construction

- 150mm surface can
- Suspended option
- Multi-faceted 40° reflector
- Tridonic LED driver system

### Features

- UGR 19 and ECA compliant variants
- DALI and dimming options
- IP20

### Applications

- Commercial and Business Areas
- Public buildings
- Co-work spaces
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

### Benefits

- Ideal for ceilings with no void
- Contemporary style
- Made in the UK
- High performance

### Optical Options

Code	Description
<b>N/A</b>	Multi-faceted 40° reflector

### CCT Options

Code	Description
<b>4K8</b>	4000K
<b>3K8</b>	3000K


For 3000K version, replace '4K8' in part number with '3K8'

### Control Options

Code	Description
<b>D</b>	DALI
<b>S</b>	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

### Dimensions

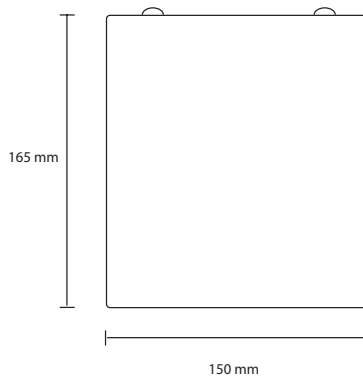

### Mounting Options

Code	Description
<b>N/A</b>	Surface mounted (Standard)
<b>/SUS</b>	Suspended

### Finish Options

Code	Description
<b>B</b>	Black RAL 9005
<b>W</b>	White RAL 9010 (Standard)
<b>BW</b>	Brilliant White RAL 9016
<b>G</b>	Grey RAL 9006

For White finish, replace 'B' in part number with 'W' for Grey replace 'B' with 'G'

### Emergency Options

Code	Description
<b>/EM</b>	3 hour maintained, manual test

For emergency version, add onto end of part number as required

[synergy.gb.net](http://synergy.gb.net)

01992 445828

[sales@synergy.gb.net](mailto:sales@synergy.gb.net)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 °C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/- 10%. Synergy reserve the right to amend or change details without prior notification.

[synergy.gb.net](http://synergy.gb.net)