


ARROW

COMMERCIAL LED DOWNLIGHT



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
ARRW/F/2450/4K8	White	186mm dia.	2442	19.2	127.2	4000K	>80

- 5 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

REVISED : 27 July 2020 4:06 pm



COMMERCIAL LED DOWNLIGHT

Construction

- Tridonic LED Module
- Multi-faceted 40° reflector
- IP20

Features

- Adjustable LED gimble
- Low Glare supports UGR19
- Dimmable and emergency options

Applications

- Commercial and Business Areas
- Public buildings
- Retail environments
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Height under 102mm
- 5 Year warranty

Optical Options

Code	Description
N/A	Multi-faceted 40° reflector

CCT Options


Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
/D	DALI
/S	Switchdim control

Dimensions

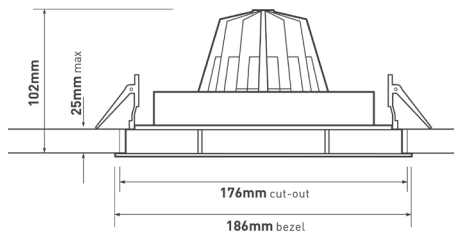

Mounting Options

Code	Description
N/A	Recessed (Standard)

Finish Options

Code	Description
W	White (Standard)

For White finish, replace 'B' in part number with 'W' for Grey replace 'B' with 'G'

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required