

Code	Finish	Size (mm)	Beam Angle	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
TMYW/F/1700/4K8/H/40	White / Horizontal gearbox	82x206x154mm	40 degree	1644	13.8	119.1	4000	>80
TMYW/F/2300/4K8/H/40	White / Horizontal gearbox	82x206x154mm	40 degree	2282	19.1	119.5	4000	>80
TMYW/F/3100/4K8/H/40	White / Horizontal gearbox	82x206x154mm	40 degree	3079	27.5	112.0	4000	>80
TMYW/F/1700/4K8/V/40	White / Vertical gearbox	82x125x125mm	40 degree	1644	13.8	119.1	4000	>80
TMYW/F/2300/4K8/V/40	White / Vertical gearbox	82x125x125mm	40 degree	2282	19.1	119.5	4000	>80
TMYW/F/3000/4K8/V/40	White / Vertical gearbox	82x125x125mm	40 degree	3079	27.5	112.0	4000	>80

- 3 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet
- Stucchi track compatible

COMMERCIAL TRACK SPOTLIGHT

Construction

- Medium beam reflector
- Swivel and tilt adjustment

Features

- Dimming option
- Stucchi track compatible
- Short circuit and overload protection

Applications

- Commercial and Business Areas
- Public buildings
- Retail environments
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Contemporary track spotlight
- Vertical and horizontal
- Efficient LED system

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S' DALI Track required


Mounting Options

Code	Description
/H	Horizontal gearbox
/V	Vertical gearbox


Finish Options

Code	Description
W	White
B	Black

Dimensions

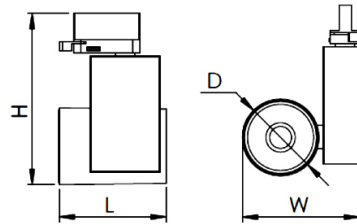

L, mm	W, mm	H, mm	D, mm
125	125	182	82
142	142	187	84

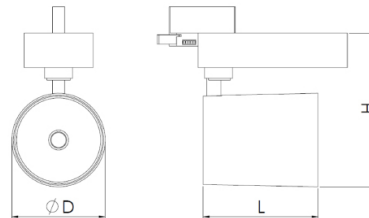

∅ D, mm	L, mm	H, mm
82	206	154
99	195	198