



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
STRB/F/1320/3K8	Black	1320	1550	12.6	123.0	3000	>80
STRB/F/1320/4K8	Black	1320	1625	12.6	129.0	4000	>80
STRG/F/1320/3K8	Grey	1320	1550	12.6	123.0	3000	>80
STRG/F/1320/4K8	Grey	1320	1625	12.6	129.0	4000	>80
STRR/F/1320/3K8	Red	1320	1550	12.6	123.0	3000	>80
STRR/F/1320/4K8	Red	1320	1625	12.6	129.0	4000	>80

- See website for LDT files
- For CAD/BIM contact us
- See website for Technical Data Sheet
- IP20
- For DALI control, replace 'F' in part number with 'D'
- For Switchdim control, replace 'F' in part number with 'S'

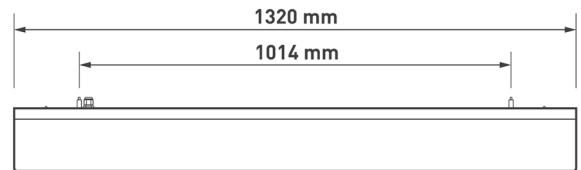

synergy.gb.net

01992 445828

sales@synergy.gb.net

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 °C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/- 10%. Synergy reserve the right to amend or change details without prior notification.

REVISED : 24September202011:47am

