

SOMBRERO ARC LOW GLARE



CURVED FEATURE PENDANT SYSTEM



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
Curves							
SOMASB/HX/F/A1/4K8	Black	22.5° arc / 5000 ø	1815	14	129.6	4000	>80
SOMASB/HX/F/A2/4K8	Black	45° arc / 3000 ø	2074	18	115.2	4000	>80
SOMASB/HX/F/A3/4K8	Black	90° arc / 2000 ø	2554	22	116.1	4000	>80
SOMASB/HX/F/A4/4K8	Black	90° arc / 1500 ø	2074	18	115.2	4000	>80
SOMASB/HX/F/A5/4K8	Black	90° arc / 1200 ø	1555	13	119.6	4000	>80
Straights							
SOMASB/HX/F/0565/4K8	Black	565 straight	1037	9	115.2	4000	>80
SOMASB/HX/F/0847/4K8	Black	847 straight	1555	13	119.6	4000	>80
SOMASB/HX/F/1129/4K8	Black	1129 straight	2028	18	112.7	4000	>80
SOMASB/HX/F/1411/4K8	Black	1411 straight	2593	22	117.9	4000	>80

- Part numbers are for individual luminaires.
- 5 year warranty
- See website for LDT files
- For BIM models, please contact us
- For continuous lighting system just send us a .dwg
- See website for Technical Data Sheet
- Tridonic or Philips boards as standard others available by request

REVISED : 6 November 2020 4:20 pm



SOMBRERO ARC LOW GLARE

CURVED FEATURE PENDANT SYSTEM

Construction

- Extruded aluminium profile
- Die-cast aluminium end caps
- Clip-in diffuser
- Tridonic LED boards

Features

- High efficiency LED boards
- Range of length options
- Wide-beam light distribution

Applications

- Commercial and Business Areas
- Public buildings
- Retail
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Custom-fit options
- Contemporary style
- Energy efficient solution
- European control gear

Optical Options

Code	Description
N/A	Low Glare (Standard)

CCT Options


Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

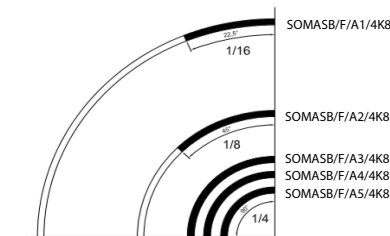

Other curve options available on request

Mounting Options

Code	Description
N/A	Suspended

Finish Options

Code	Description
B	Black RAL 9005 (Standard)
W	White RAL 9016
S	Silver RAL 9006
RAL	Any RAL by request
SFX	Special effect finishes (SFX) by request. See Product Portfolio

For White finish, replace 'B' in part number with 'W' for Silver replace 'B' with 'S'. Contact us for custom RAL and SFX finish prices

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required

synergy.gb.net

01992 445828

sales@synergy.gb.net

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 °C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/- 10%. Synergy reserve the right to amend or change details without prior notification.

synergy.gb.net