

Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
LRM/66/F/32/3K8	White	595x590	3088	29.2	105.8	3000	>80
LRM/66/F/32/4K8	White	595x590	3226	29.2	110.5	4000	>80
LRM/66/F/47/3K8	White	595x590	4554	39.4	115.6	3000	>80
LRM/66/F/47/4K8	White	595x590	4758	39.4	120.8	4000	>80

- Part numbers are for individual luminaires.
- 3 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet
- For Plasterboard frame, please order: LRM/PBFRAME

WING LED LUMINAIRE

Construction

- Micro-prismatic PMMA diffuser
- Steel sheet

Features

- UV stable
- Dimmable options

Applications

- Offices
- Public spaces
- Hospitals
- Retail
- Corridors
- Schools

Benefits

- IP40
- 3 year warranty

Optical Options

Code	Description
N/A	Micro Prismatic (Standard)

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

Mounting Options


Code	Description
N/A	Recessed (Standard)

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required

Dimensions

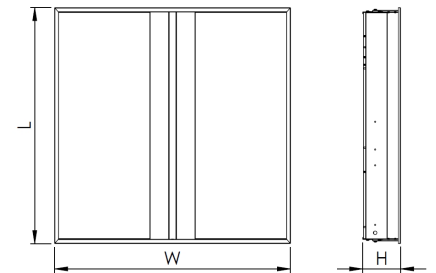

L, mm	W, mm	H, mm
595	595	96