


DOLIO MIDI 3

SURFACE LED DOWNLIGHT



| Code | Finish | Beam Angle (°) | Size (mm) | Delivered Lumens (lm) | Total System Wattage (W) | Efficacy (lm/cw) | Colour Temp (°K) | CRI |
|-----------------------------|--------|----------------|------------|-----------------------|--------------------------|------------------|------------------|-----|
| DOLM2B/F/1350/4K8/25 | Black | 25 | 120ø x 295 | 2485 | 17.7 | 140.4 | 4000 | >80 |
| DOLM2B/F/2000/4K8/25 | Black | 25 | 120ø x 295 | 4570 | 32.4 | 141.0 | 4000 | >80 |
| DOLM2B/F/1350/4K8/40 | Black | 40 | 120ø x 295 | 2485 | 17.7 | 140.4 | 4000 | >80 |
| DOLM2B/F/2000/4K8/40 | Black | 40 | 120ø x 295 | 4570 | 32.4 | 141.0 | 4000 | >80 |
| DOLM2B/F/1350/4K8/60 | Black | 60 | 120ø x 295 | 2485 | 17.7 | 140.4 | 4000 | >80 |
| DOLM2B/F/2000/4K8/60 | Black | 60 | 120ø x 295 | 4570 | 32.4 | 141.0 | 4000 | >80 |

- 5 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

DOLIO MIDI 3

SURFACE LED DOWNLIGHT

Construction

- Extruded aluminium
- Multi-faceted reflector
- Polycarbonate diffuser
- Tridonic LED boards

Features

- Ideal for ceilings without a void
- Range of beam angle options
- Dimming options

Applications

- Commercial and Business Areas
- Public buildings
- Retail
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Contemporary style
- Energy efficient solution
- Tridonic control gear

Optical Options

| Code | Description |
|------|----------------|
| N/A | 25° beam angle |
| N/A | 40° beam angle |
| N/A | 60° beam angle |

CCT Options

| Code | Description |
|------|------------------|
| 4K8 | 4000K (Standard) |
| 3K8 | 3000K |

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

| Code | Description |
|------|-------------------|
| N/A | DALI |
| N/A | Switchdim control |

For DALI or Switchdim control, please contact sales team

Mounting Options

| Code | Description |
|------|----------------------------|
| N/A | Surface Mounted (Standard) |
| /SUS | Suspended |


For suspended version please add '/SUS' on the end of the part number.

Finish Options

| Code | Description |
|------|------------------|
| B | Black (Standard) |
| W | White |
| G | Grey |

For White finish, replace 'B' in part number with 'W' for Grey replace 'B' with 'G'

Dimensions

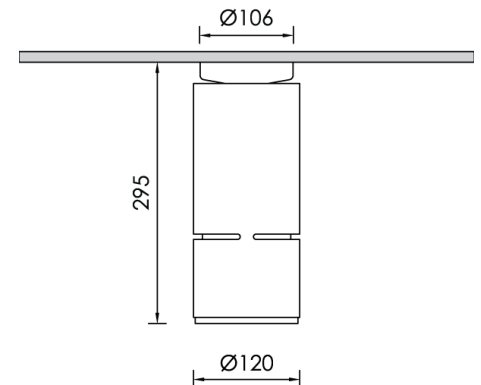

synergy.gb.net

01992 445828

sales@synergy.gb.net

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25 °C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/- 10%. Synergy reserve the right to amend or change details without prior notification.

synergy.gb.net