



**NEXT DAY DELIVERY**

**5 YEAR WARRANTY**  
1 YR BATTERY


**WHITE OR BLACK FINISH**

NOTE: Conduit and BESA box mounting

Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Control Gear	Area
<b>NEXT DAY DELIVERY</b>						
<b>SPEW/R/3W/DST/COR</b>	White	ø 178	155	20.5	DALI	Corridor
<b>SPEW/R/3W/DST/COR/BLK</b>	Black	ø 178	155	20.5	DALI	Corridor
<b>SPEW/R/3W/DST/OA</b>	White	ø 178	123	20.5	DALI	Open Area
<b>SPEW/R/3W/DST/OA/BLK</b>	Black	ø 178	123	20.5	DALI	Open Area

Distance table for evenescape routes - based upon 2m width of escape route

Lens	Mounting Height	Axial / Wall	Axial / Axial	Axial / Transverse	Transverse / Transverse	Transverse / Wall
<b>Open Area</b>	2m	2.97m	7.47m	7.36m	7.5m	2.97m
<b>Corridor</b>	2m	2.14m	5.76m	10.97m	16.72m	6.97m
<b>Open Area</b>	2.5m	2.98m	8.2m	8.07m	8.24m	3.09m
<b>Corridor</b>	2.5m	2.1m	6.1m	12.00m	19.05m	7.26m
<b>Open Area</b>	3m	3.00m	8.64m	8.53m	8.56m	3.11m
<b>Corridor</b>	3m	2.02m	6.4m	12.69m	20.17m	7.07m
<b>Open Area</b>	3.5m	2.83m	8.8m	8.71m	8.82m	3.04m
<b>Corridor</b>	3.5m	1.78m	6.01m	12.47m	20.73m	6.31m

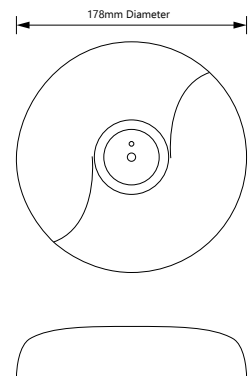

Maintenance factor: 0.9  
Ballast lumen factor: 1.00  
Minimum illuminance on centre line: 1 lux  
Minimum illuminance on half of escape route width: 0.5 lux  
Diversity on the centre line maximum: 40:1