


# CANNE

## SURFACE LED DOWNLIGHT



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
<b>CANW/F/1100/3K8</b>	White	200ø	1068	15.1	70.7	3000	>80
<b>CANW/F/1100/4K8</b>	White	200ø	1168	15.1	77.4	4000	>80
<b>CANW/F/2000/3K8</b>	White	200ø	1778	25.1	70.8	3000	>80
<b>CANW/F/2000/4K8</b>	White	200ø	1946	25.2	77.2	4000	>80
<b>CANW/F/3000/3K8</b>	White	200ø	2537	34.7	73.1	3000	>80
<b>CANW/F/3000/4K8</b>	White	200ø	2769	34.8	79.6	4000	>80
<b>CANW/F/4000/3K8</b>	White	200ø	3474	46.3	75.0	3000	>80
<b>CANW/F/4000/4K8</b>	White	200ø	3792	46.4	81.7	4000	>80

- 5 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

REVISED : 27 July 2020 12:47 pm



## SURFACE LED DOWNLIGHT

### Construction

- Spun aluminium
- Philips LED and driver
- 60° satin etch reflector
- 2m suspension kit available

### Features

- L70/B10 @ >60,000 hours
- Integral DALI option
- IP20

### Applications

- Commercial and Business Areas
- Public buildings
- Retail
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

### Benefits

- Custom-fit options
- Contemporary style
- Range of finish options
- Ideal for ceilings without a void

### Optical Options

Code	Description
N/A	60° satin etch reflector (Standard)

### CCT Options


Code	Description
4K8	4000K
3K8	3000K

### Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

### Dimensions

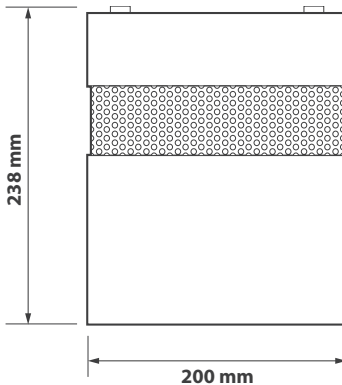

### Mounting Options

Code	Description
N/A	Surface Mounted (Standard)
/SUS	Suspended 2M

For suspended version please add '/SUS' on the end of the part number.

### Finish Options

Code	Description
B	Black
W	White (Standard)
G	Grey

For White finish, replace 'B' in part number with 'W' for Grey replace 'B' with 'G'

### Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ES	3 hour maintained, Self Test

For emergency version, add onto end of part number as required

### Suspended

