

SLIMLINE LED RESSESSED DOWNLIGHT



Code	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
CVS/12/F/0450/4K8	White	ø120	450	6	75	4000	>80
CVS/17/F/0900/4K8	White	ø170	917	12	76	4000	>80
CVS/24/F/1800/4K8	White	ø240	1800	24	75	4000	>80

- 3 year warranty
- See website for LDT files
- For BIM models, please contact us
- See website for Technical Data Sheet

SLIMLINE LED RESSESSED DOWNLIGHT

Construction

- Die-cast aluminum
- Spring clips
- Opal diffuser

Features

- Low height
- Suitable for plasterboard
- UV stable

Applications

- Offices
- Public spaces
- Hospitals
- Retail environments
- Hotels and restaurants
- Schools

Benefits

- For low and restricted ceiling voids

Optical Options

Code	Description
N/A	Opal

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

Mounting Options


Code	Description
N/A	Recessed

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required.

Dimensions

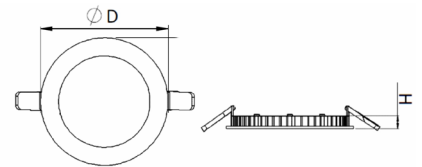

∅ D, mm	H, mm	∅ A, mm
120	12	110
170		160
240		225