
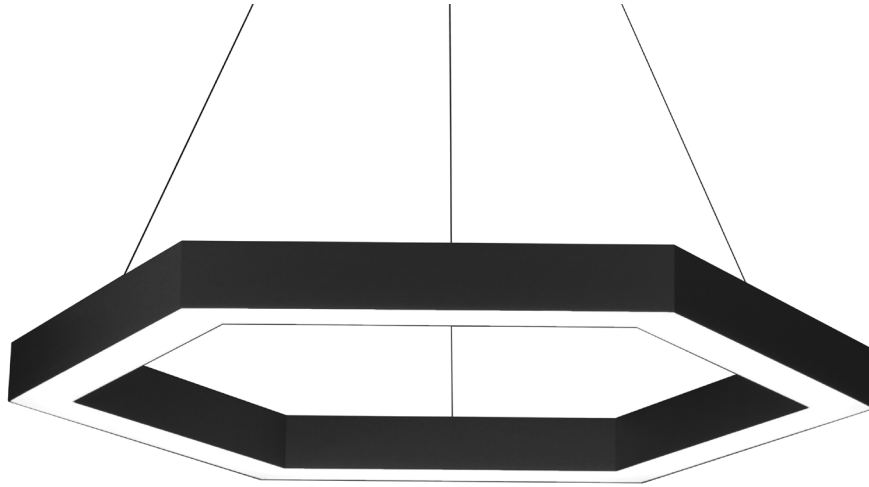


# POLARIS HEXAGON

## LED FEATURE PENDANT



Code	Finish	Diffuser	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
<b>P1HB/OS/F/0280/4K8</b>	Black	Opal	6x280mm	5510	47	117.2	4000K	>80
<b>P1HB/OS/F/0580/4K8</b>	Black	Opal	6x580mm	11020	94	117.2	4000K	>80
<b>P1HB/OS/F/0880/4K8</b>	Black	Opal	6x880mm	16530	140	118.1	4000K	>80
<b>P1HB/OS/F/1160/4K8</b>	Black	Opal	6x1160mm	22040	187	117.9	4000K	>80

- Part numbers are for individual luminaires.
- 5 year warranty
- See website for Relux
- For BIM contact us
- For bespoke lengths please contact us
- See website for Technical Data Sheet
- Available in Polaris 1 and Polaris 50 profile

# POLARIS HEXAGON

## LED FEATURE PENDANT

### Construction

- Extruded aluminium profile
- Clip-in diffuser
- Tridonic LED boards

### Features

- High efficiency LED boards
- Range of size options
- Wide-beam light distribution

### Applications

- Commercial and Business Areas
- Public buildings
- Retail
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

### Benefits

- Custom-fit options
- Contemporary style
- Energy efficient solution
- European control gear

### Optical Options

Code	Description
/OS	Opal (Standard)
/HX	Low Glare (See low glare spec)

### CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K


For 3000K version, replace '4K8' in part number with '3K8'

### Control Options

Code	Description
D	DALI
S	Switchdim control

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

### Profile Options

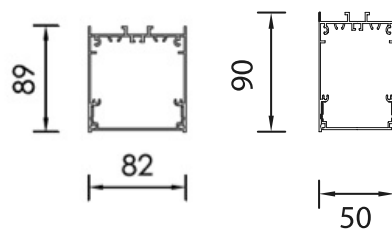

### Mounting Options

Code	Description
P1/SUS/1.25M	Suspended 1.25M
P1/SUS/3.0M	Suspended 3M
/SM	Surface Mounted

For surface add /SM onto end of part number. For suspended specify the codes separately.

### Finish Options

Code	Description
B	Black RAL 9005 (Standard)
W	White RAL 9016
S	Silver RAL 9006
RAL	Any RAL by request
SFX	Special effect finishes (SFX) by request. See Product Portfolio

For White finish, replace 'B' in part number with 'W' for Silver replace 'B' with 'S'. Contact us for custom RAL and SFX finish prices

### Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required

### Continuous Options

Code	Description
C	Continuous
P1B/ENDCAP	L End Cap - Black
P1W/ENDCAP	L End Cap - White

For continuous replace 'I' in part number with 'C'. Please specify end caps codes for continuous separately